


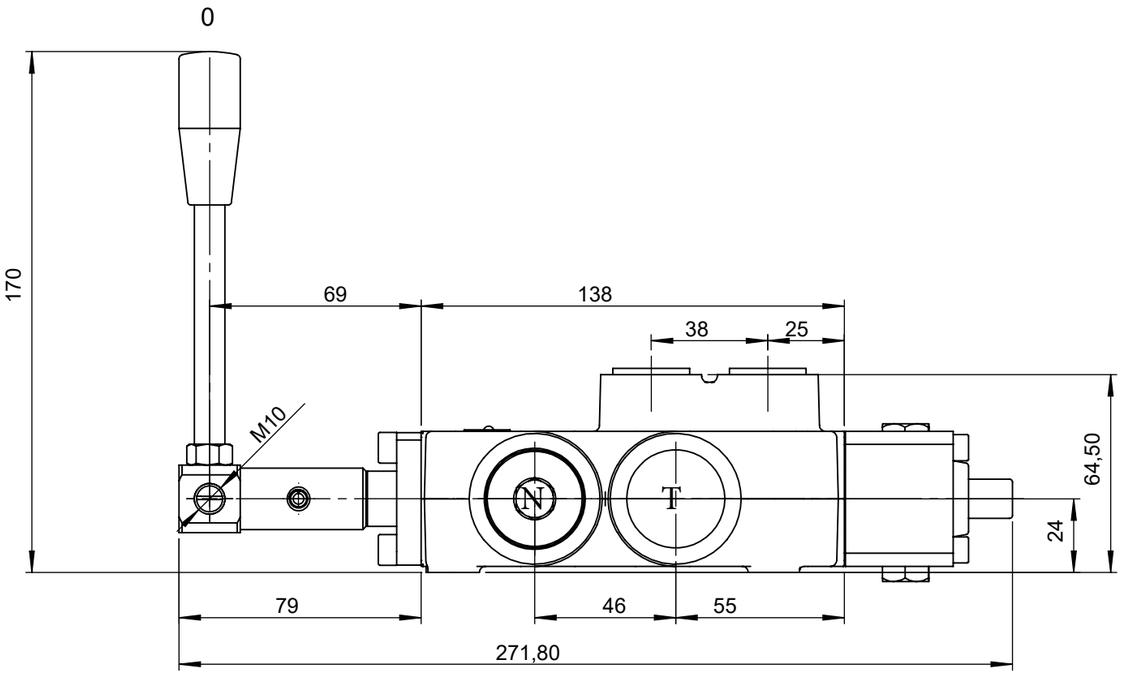


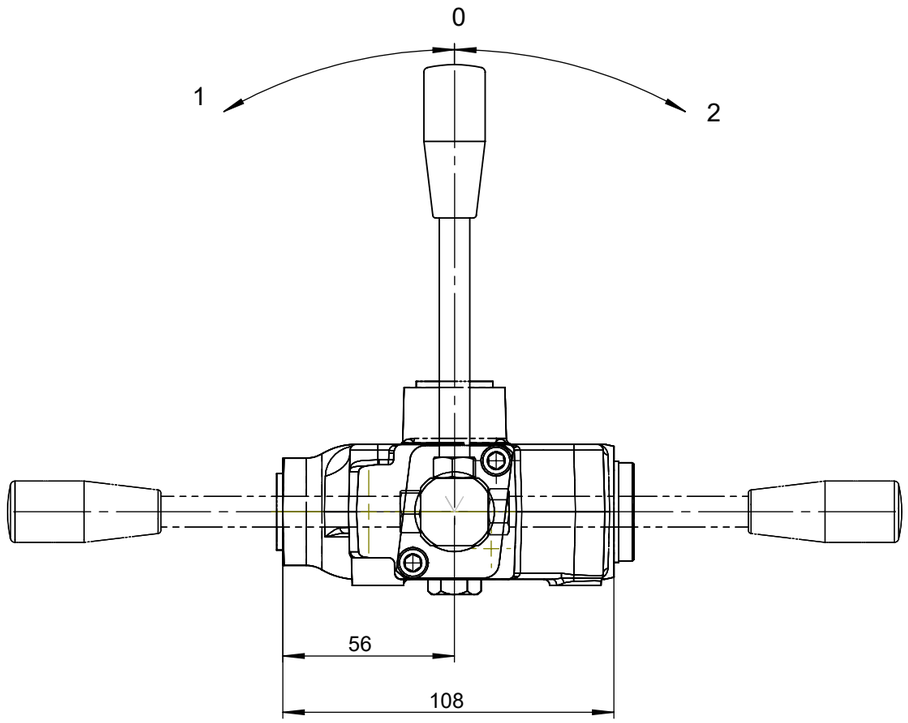

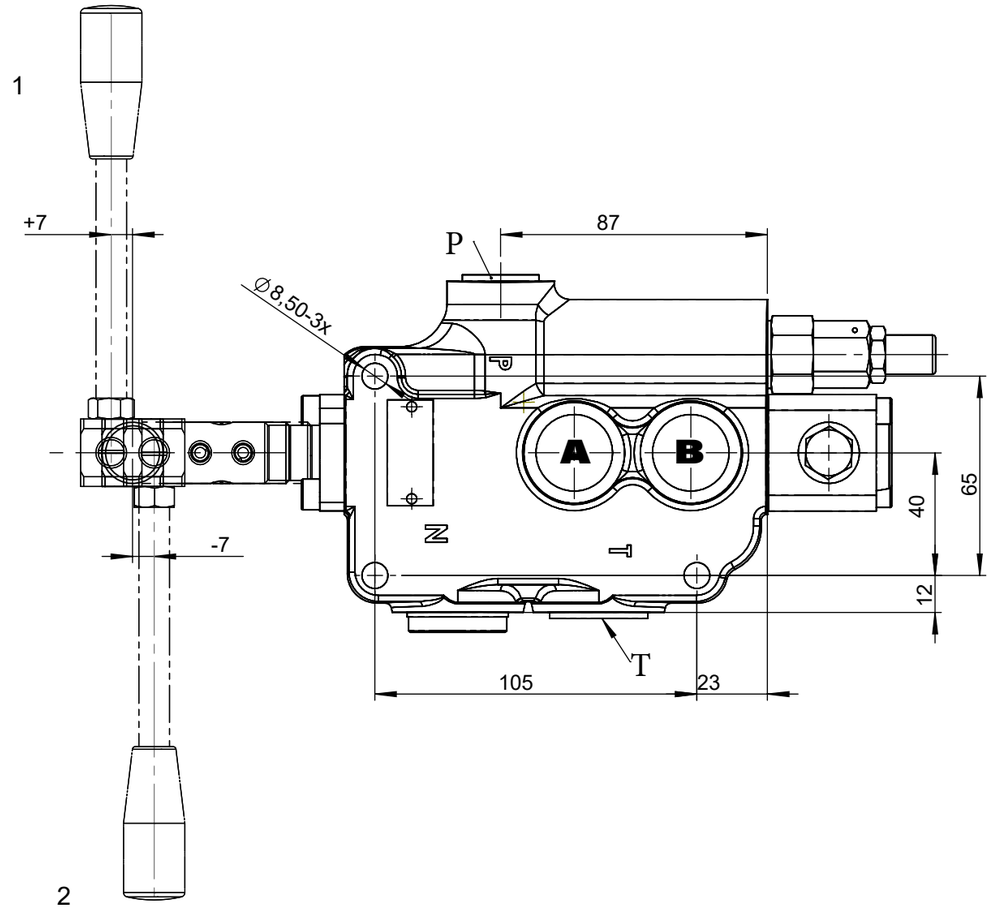

Nominal flow rate: 80 l/min
Operating pressures:
@ port P - 250 bar @
port A, B - 300 bar @
port T - 50 bar

Port threads:
Port P - BSP G 1/2"
Port A, B - BSP G 1/2"
Port T - BSP G 3/4"
Port N - BSP G 3/4"

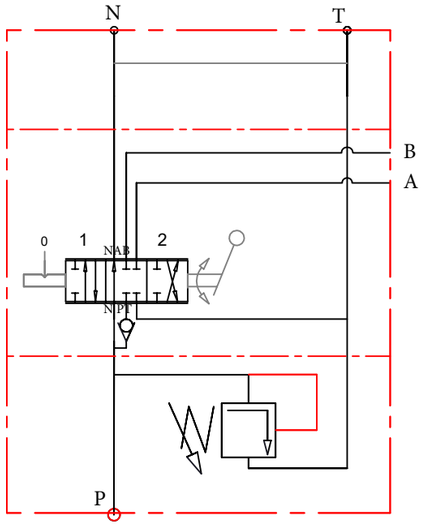

Working conditions
Recommended Oil Viscosity range:10 cSt to 100 cSt
Recommended Oil Filtering:β10 ≥ 75
Max Contamination: class 10 (NAS 1638)
19/16(ISO 4406)
Internal leakage (100 bar 46 cSt) - 6 ccm/min

			VINCKE	1:2	1 / 1	P80 A26 G		
				A3		№ VNK220500	маса (г)	4.108